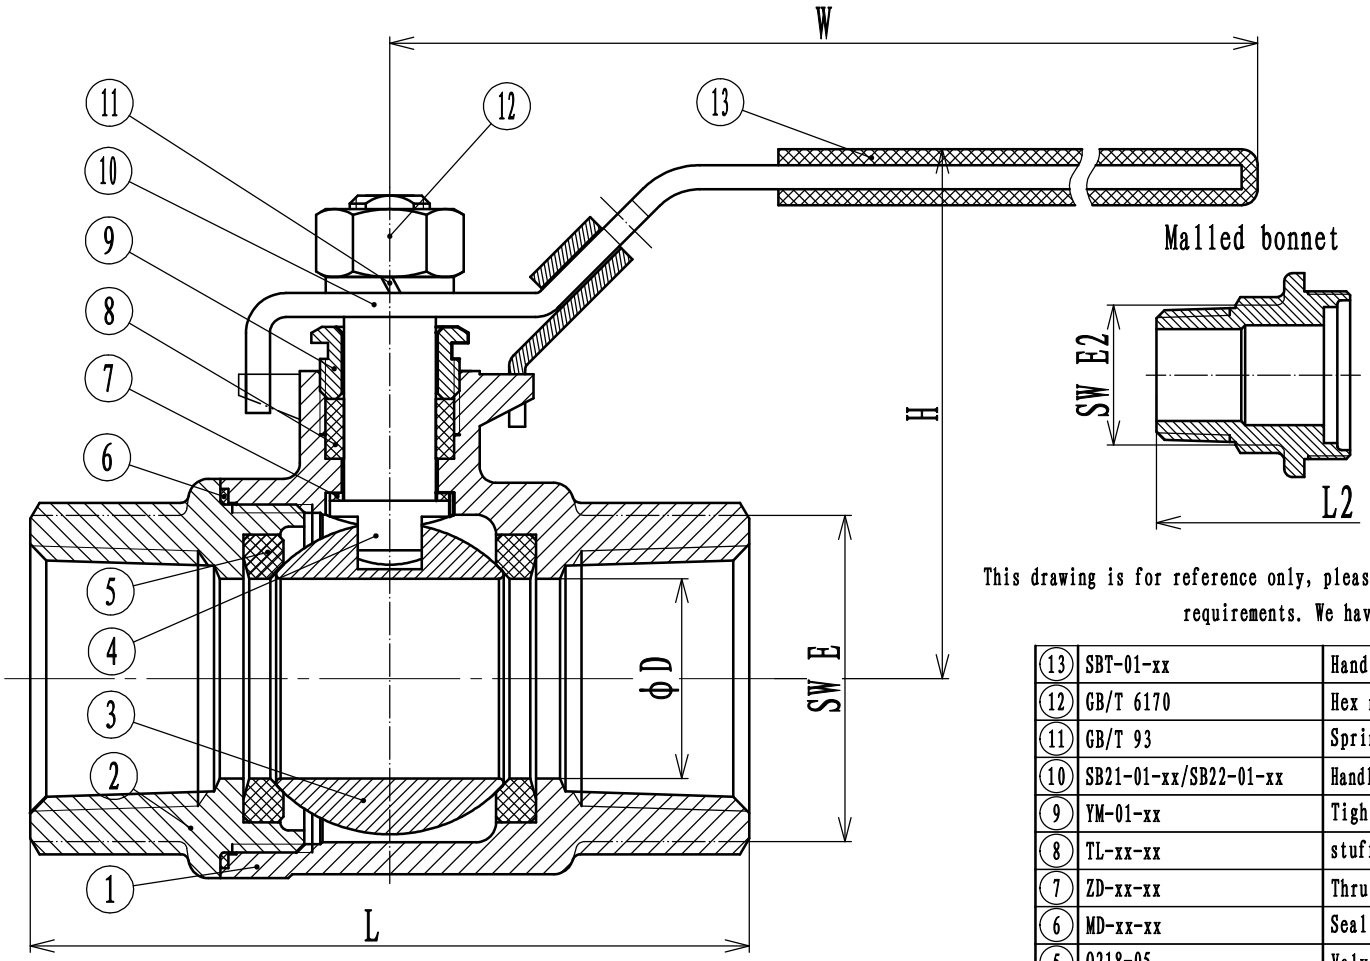


Design specifications
Design basis: ASME B16.34;
Structure length: enterprise standard;
Thread standard: customer order requirements;
Pressure
temperature: -29~38° C/6.9MPa、160° C/2.5MPa;
Applicable medium: water, oil, steam and other corrosive, no hard particles of media.

Pressure Test Procedure		
Pressure Rating		1000psi
Test Standard		API598
Test pressure	Shell test	10.4MPa/60s
	High-pressure water closure	7.6 MPa/60s
	Low-pressure gas closure	0.6 MPa/60s

This drawing is for reference only, please ask for confirmation from our sales representatives for your special requirements. We have the right to change the design of our products.

Note: The deviation of size L is ±1 in 1/4~1 1/2" and ±1.5 in 2~4".

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
W	104	104	104	126	144	144	189	189	223	223	298
H	51	51	53	65	77	81.5	94.5	102	119	129	169
H(Non-locked)	48	48	49	57	67	72	94	102	119	129	169
L	51.5	51.5	63.5	74	86	98	105.5	122	159	182	224
D	11	12.5	15	20	25	32	38	50	65	76	94
E	22	22	26	32	40	48	56	70	83.5	102	130
L2	60.5	60.5	78.5	88.5	100	110.5	121	141.5	/		
E2	18	18	23	28.5	35	43.5	49.5	62			

No.	P/N	Name	Qty.	Material	Single Weight	Total Weight	Note
13	SBT-01-xx	Handle cover	1	PVC			
12	GB/T 6170	Hex nut	1	A2-70			
11	GB/T 93	Spring washers	1	304			
10	SB21-01-xx/SB22-01-xx	Handle/non-lockable handle	1	A240-304			
9	YM-01-xx	Tighten the nut	1	A182-F304			
8	TL-xx-xx	stuffing	1	PTFE			
7	ZD-xx-xx	Thrust washer	1	PTFE			
6	MD-xx-xx	Sealing gaskets	1	PTFE			
5	Q218-05	Valve seat	2	RPTFE			
4	Q218-04	Stem	1	A276-316			
3	QTZS-xx-xx	sphere	1	A182-F316			
2	Q21(3)8-02	Bonnet	1	A351-CF8M			
1	Q218-01	Valve body	1	A351-CF8M			

MARKER	REVISE	PARTITION	FILE NO.	SIGNATURE	DATE
DESIGN				PROJECTION	
AUDIT				RATIO	1.5:1
APPROVAL				VERSION	B1
				Page 1 of 1	

2PC ball valve | Q21(3)8-00

PPS International
Address: De Zwingel 7b, 4926 DC Lage Zwaluwe, The Netherlands
Website: https://www.pps-nl.com/maritime
ISO9001-2015 certified (download)