DN	L	H	H1	D1	Hcd1	n1	d1	D	D2	Hcd2	n2	d2	D0	Weight(KG)
50	180	300	90	165	125	4	18	80	200	160	4	18	140	12
65	200	310	100	185	145	4	18	85	220	180	8	18	140	14
80	215	325	108	200	160	8	18	100	250	210	8	18	140	18
100	250	335	130	220	180	8	18	130	285	240	8	22	140	27
125	290	410	152	250	210	8	18	158	315	270	8	22	180	37
150	330	435	176	285	240	8	22	190	340	295	8	22	180	49

Technical Specification:

1、Valve:STORM VALVE;

2、Design and Manufacture:DIN 87101;

3、Face To Face:DIN 3203;

4、End Connection:DIN 159721 (PN10);


5、Inspection Test:EN 12266-1.

6、COATING:COATING:RAL 5026,(75+50+25)μm

handwheel coating:RAL 9005

Working Pressure:4 Bar

Specification Standard Sheet		
Shell Test Pressure	1.5	MPa
High Pressure Seal Test	1.1	

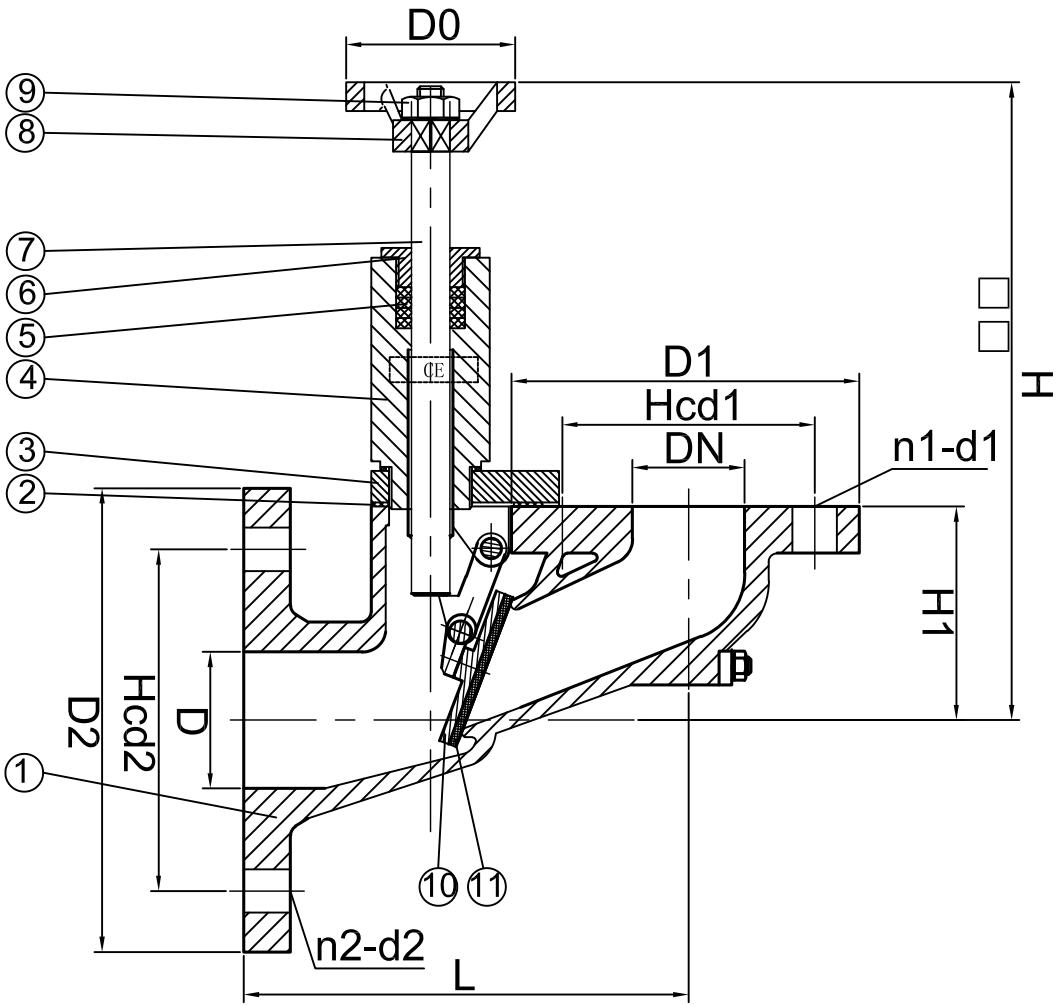

ITEM	PART NAME	MATERIAL	REMARKS/STD.
11	SEAL	NBR	
10	DISC	RG5	
9	NUT	Q235A	
8	HANDWHEEL	GG25	
7	STEM	Ms58	
6	GLAND	Ms58	
5	PACKING	PTFE	
4	SLEEVE	CuZn40Pb	
3	BONNET	JS1025 / EN-GJS-400-18-LT	
2	GASKET	ARAMID FIBER	
1	BODY	JS1025 / EN-GJS-400-18-LT	

ISSUE REV.	DATE	SIGN.	DESCRIPTION	APPR. DATE	CHKD.
03					
02					
01					
00					

DRWN. BY :D.X DATE :27-05-'26

CHKD. BY :J.W DATE :27-05-'26

APPR. BY :M.Q DATE :27-05-'26

SCALE : AM.PROJ.

SURFACE ROUGHNESS ACCORDING TO ISO-1302

SIZE A3 DN 50-150mm

DRWG. NO. 287005001501H-1

REV. 02

PPS International